THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

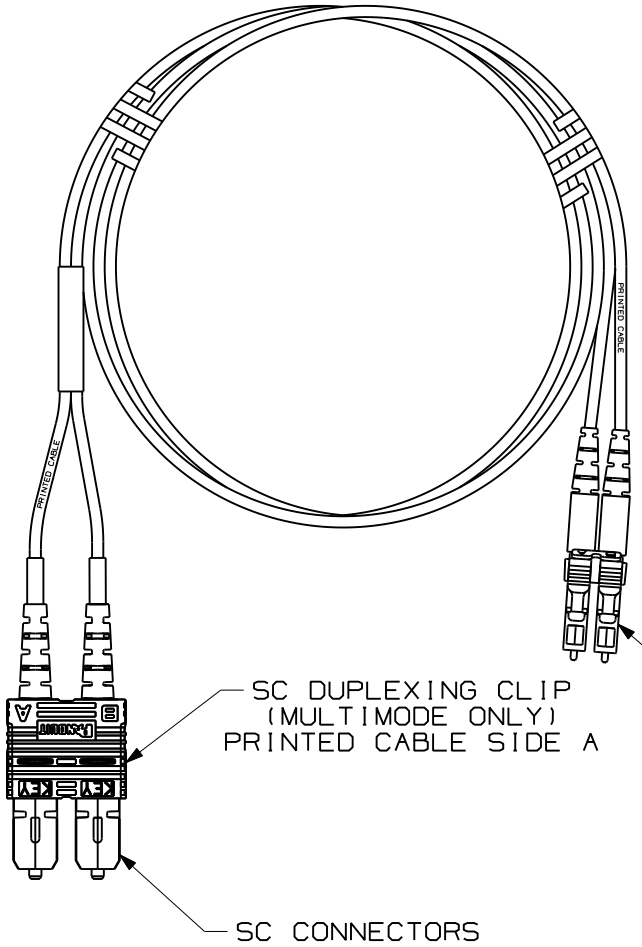

NOTES:
1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-10			

FIBER OPTIC PATCH CORD
DUPLEX SC TO LC CONFIGURATION
CUSTOMER DRAWING

PANDUIT™ CORP.
TINLEY PARK, ILL 60477

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±.010 [0.3]
(.XX)±.03 [0.8] ANGLES

DRAWN BY: MC
DATE: 04-27-07
CHK'D: RAF
REVIEW DRAWING NUMBERS

DRAWING FILENAME: M02779BB_DC/01A
SCALE: NONE
PART NO.: SEE SHEETS 2, 3 & 4
DRAWING NO.: 02779-10
SHEET 1 OF 4
SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX SC TO LC FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				SC CONNECTOR			LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	BOOT COLOR	MAX. IL	MIN. RL	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5E3-10M*Y	RISER (OFNR)	50/125um	DUPLEX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK	0.25dB	20dB	BLACK
F6E3-10M*Y		62.5/125um					ELECTRIC IVORY			ELECTRIC IVORY
FXE3-10M*Y		10GbE OM3		AQUA	0.25dB	26dB	AQUA	0.25dB	26dB	AQUA
FXOE3-10M*		OPTIMIZED 10GbE OM3			0.15dB	26dB		0.15dB	26dB	
FZE3-10M*		10GbE OM4		AQUA	0.25dB	26dB	AQUA	0.25dB	26dB	AQUA
FZOE3-10M*		OPTIMIZED 10GbE OM4			0.15dB	26dB		0.15dB	26dB	
F9E3-10M*Y		9/125um OS1		YELLOW	0.50dB	55dB	BLUE	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-10			

FIBER OPTIC PATCH CORD
DUPLEX SC TO LC CONFIGURATION
CUSTOMER DRAWING

PANDUIT™ CORP.
TINLEY PARK, ILL 60477

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±.010 [0.3]
(.XX)±.03 [0.8] ANGLES

DRAWN BY: MC
DATE: 04-27-07
CHK'D: RAF
REVIEW DRAWING NUMBERS

DRAWING FILENAME: M02779BB_DC/01A
SCALE: NONE
PART NO.: SEE SHEETS 2, 3 & 4
DRAWING NO.: 02779-10
SHEET 2 OF 4
SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX SC TO LC FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				SC CONNECTOR			LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	BOOT COLOR	MAX. IL	MIN. RL	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5PE3-10M*Y	PLENUM (OFNP)	50/125um	DUPLEX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK	0.25dB	20dB	BLACK
F6PE3-10M*Y		62.5/125um					ELECTRIC IVORY			ELECTRIC IVORY
FXPE3-10M*Y		10GbE OM3		AQUA	0.25dB	26dB	AQUA	0.25dB	26dB	AQUA
FXOPE3-10M*		OPTIMIZED 10GbE OM3			0.15dB	26dB		0.15dB	26dB	
FZPE3-10M*		10GbE OM4		AQUA	0.25dB	26dB	AQUA	0.25dB	26dB	AQUA
FZOPE3-10M*		OPTIMIZED 10GbE OM4			0.15dB	26dB		0.15dB	26dB	
F9PE3-10M*Y		9/125um OS1		YELLOW	0.50dB	55dB	BLUE	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-10			

FIBER OPTIC PATCH CORD
DUPLEX SC TO LC CONFIGURATION
CUSTOMER DRAWING

PANDUIT™ CORP.
TINLEY PARK, ILL 60477

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±.010 [0.3]
(.XX)±.03 [0.8] ANGLES

DRAWN BY: MC
DATE: 04-27-07
CHK'D: RAF
REVIEW DRAWING NUMBERS

DRAWING FILENAME: M02779BB_DC/01A
SCALE: NONE
PART NO.: SEE SHEETS 2, 3 & 4
DRAWING NO.: 02779-10
SHEET 3 OF 4
SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX SC TO LC FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				SC CONNECTOR			LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	BOOT COLOR	MAX. IL	MIN. RL	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5LE3-10M*Y	LOW SMOKE ZERO HALOGEN (LSZH) IEC	50/125um	DUPLEX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK	0.25dB	20dB	BLACK
F6LE3-10M*Y		62.5/125um					ELECTRIC IVORY			ELECTRIC IVORY
FXLE3-10M*Y		10GbE OM3		AQUA	0.25dB	26dB	AQUA	0.25dB	26dB	AQUA
FXOLE3-10M*		OPTIMIZED 10GbE OM3			0.15dB	26dB		0.15dB	26dB	
FZLE3-10M*		10GbE OM4		AQUA	0.25dB	26dB	AQUA	0.25dB	26dB	AQUA
FZOLE3-10M*		OPTIMIZED 10GbE OM4			0.15dB	26dB		0.15dB	26dB	
F9LE3-10M*Y		9/125um OS1		YELLOW	0.50dB	55dB	BLUE	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-10			

FIBER OPTIC PATCH CORD
DUPLEX SC TO LC CONFIGURATION
CUSTOMER DRAWING

PANDUIT™ CORP.
TINLEY PARK, ILL 60477

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±.010 [0.3]
(.XX)±.03 [0.8] ANGLES

DRAWN BY: MC
DATE: 04-27-07
CHK'D: RAF
REVIEW DRAWING NUMBERS

DRAWING FILENAME: M02779BB_DC/01A
SCALE: NONE
PART NO.: SEE SHEETS 2, 3 & 4
DRAWING NO.: 02779-10
SHEET 4 OF 4
SIZE: A